
HYDRAULIC HOSES TO EXTEND 24' BACK FROM CENTER OF HYDRAULIC PUMP 25 GPM/3500-4000 PSI MAX, RELIEF RESERVOIR FILLED WITH OIL, PLUMB TWO 3/4" HYDRAULIC VALVE INSTALLED AND SET AT 3000 PSI, 30 GALLON WET KIT-APRON DRIVE

## MECHANICAL TRUCK PTO DRIVE DRIVE-EXPEL ER R DRIVE

100% OF ENGINE TRUCK PTD-350 FT/LBS SPEED INTERNAL WIMEYER TURQUE RIGHT MINIMUM

ANGLE DRIVE PACKAGE

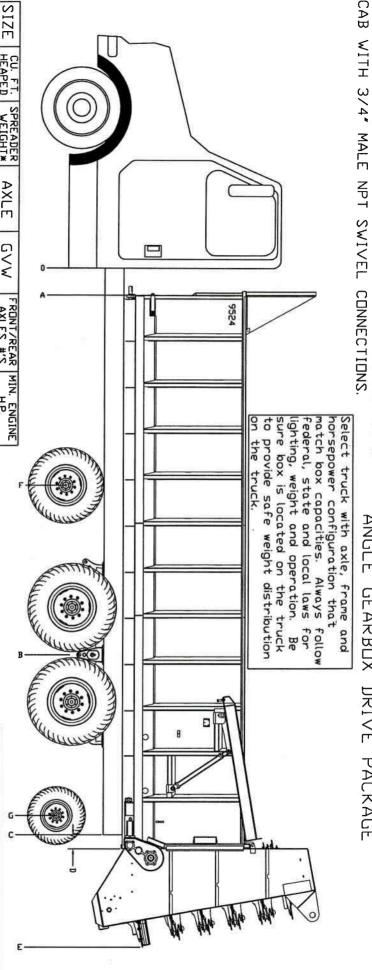

9530	9524	9524	9520	SIZE
1,180	925		755	CU. FT. HEAPED
14,900#	13,340#	13,340#	12,300#	SIZE CU. FT. SPREADER
QUAD AXLE	QUAD AXLE	TANDEM	TANDEM	AXLE
72,000#	#000,57	64,000#	64,000#	GVW
20/44,000	18/46,000 DR 20/44,000	18/46,000 DR 20/44,000	18/46,000 DR 20/44,000	FRONT/REAR MIN. ENGINE AXLES #'S H.P.
400	350	350		MIN. ENGINE H.P.
		ŏ		

*
APPX
MEIGHT
W/S200
0 ATTACHMEN
CHME

 * AFTA WEIGH WYSESS ALLACHMENT	₩ C T C D -	W/SCUU	ALIAC	IME N		PUSHER AXLE	TAG AXLE
SIZE	Α	В	0		m	-11	ت
9520	14/19"  186"		247"	10"	306"	NA	Z
9524 TANDEM	9524 TANDEM 14/19" 210"		295"	10″	354″	NA	N A
9524 QUAD	14/19"  201"		300"	10″	354"	" 113"	285 <sub>*</sub>
9530	14/19" 254"		364"	10″	426"	168″	340″
אומי דום החוד מים אום			,				

ALCAR F RUN - UT RUX

**B-CAB** CENTER OF AXLE

C-CAB REAR OF TRUCK FRAME

D-MAXIMUM SPREADER OVERHANG 10\* 무 SPREADER

BI-UNIDAD
BI-LEFT HAMD FLASHING & TURN INDICATORS
BS-RIGHT HAMD FLASHING & TURN INDICATORS
B6-CLEARANCE LAMPS FEMALE TRUCK PLUG

56-0005-2

56-0014-1

|--|

BRAKE LIGHTS TO OPERATE ACCORDING

DEPENDING ON MAKE AND MODEL OF TRUCK IT MAY BE NECESSARY TO INSTALL A LIGHT CONVERTER (MEYER PART #56-0028).

AILLIGHT CONVERTER

SCALE	FINISH	TOLERANCE: +DR- 1732 UNLESS OTHERVISE SPECIFIED		
JAA APPROVED BY	MILLE 9500 CROP MAX	MEYER MFG. CORP.		
D BY	TRUCK	RP.		

DATE 5-18-10

TRUCK MOUNT